

Посудомоечные машины для кастрюль

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: sir@nt-rt.ru || сайт: <https://sammic.nt-rt.ru/>

UTENSIL WASHER UX-600

Rack size 600 mm x 630 mm and door clearance 650 mm. Constant temperature rinsing system.



Stainless steel basket: 1
Equipment: supplementary trays: 1
Useful height: 650 mm
Cycles: 5
Cycle duration: 120 / 180 / 240 / 360 / 480"
Production baskets / hour: 30 / 20 / 15 / 10 / 7
Pressure pump power: 9000 W
Electrical connection: .

Loading

- ✓ Pump: 3 Hp / 2200 W
- ✓ Tank: 6000 W
- ✓ Boiler: 9000 W
- ✓ Total loading: 11200 W

Feed water temperature: 10°C - 60°C
Wash temperature: 40°C - 70°C
Rinse temperature: 55°C - 87°C
Wash tank capacity: 55 l
Boiler capacity: 12 l
Water consumption/cycle: 3.5 l
Drainage base maximum height: 185 mm
Drain diameter: 30 mm

External dimensions (W x D x H)

- ✓ Width: 742 mm
- ✓ Depth (closed): 852 mm
- ✓ Depth (open): 1232 mm
- ✓ Height (closed): 1843 mm
- ✓ Height (open): 2035 mm

Net weight: 168 kg
Noise level (1m.): 76 dB(A)

Crated dimensions
790 x 980 x 1950 mm

AVAILABLE MODELS

1303501	Utensil washer UX-600 230-400/50/3N DD
1303505	UX-600C 230-400/50/3N DD
1303508	UX-600BC 230-400/50/3N DD
1303506	Utensil washer UX-600C 230-400/50/3N SB DD

* Ask for special versions availability

SALES DESCRIPTION

Ideal to wash big sized pots and wares.

- ✓ Powerful and high pressure: specially indicated for restaurants, ice-cream shops, pastries and butcheries.
- ✓ Constructed from stainless steel.
- ✓ Door divided in two parts, perfectly counterbalanced, easy to handle.
- ✓ Double skinned machines: silent working and reduced thermal dispersions.
- ✓ Wash tank without corners to avoid dirt accumulation in angles.
- ✓ Stamped wash dispersers in stainless steel tubes.
- ✓ Easy to remove wash- and rinse dispersers.
- ✓ Safety micro switch at the door and electronic safety device to guarantee washing temperature and time.
- ✓ Advanced LCD control panel with humidity protection. Display of wash and rinse temperatures.
- ✓ Reduced water consumption.

INCLUDES

- ✓ 1 stainless steel basket and insert for 4 trays.
- ✓ Detergent dosing equipment.
- ✓ Rinse aid pump.

OPTIONAL

- ☐ Stainless basket.
- ☐ Stainless carrier for trays.

ACCESSORIES

- ☐ Stainless steel baskets
- ☐ Dosing equipments
- ☐ Manual water softeners
- ☐ Carrier for trays
- ☐ Automatic water softeners

SPECIFICATIONS

Basket dimensions: 600 mm x 630 mm

UTENSIL WASHER UX-600V

Rack size 600 mm x 630 mm and door clearance 650 mm. Constant temperature rinsing system. HRS system.



AVAILABLE MODELS

1303516 UX-600BCV 230-400/50/3N DD

** Ask for special versions availability*

ACCESSORIES

- | | |
|--|--|
| ☐ Stainless steel baskets | ☐ Dosing equipments |
| ☐ Manual water softeners | ☐ Carrier for trays |
| ☐ Automatic water softeners | |

SALES DESCRIPTION

Door clearance 650 mm.
Equipped with a steam condenser.

Ideal to wash big sized pots and wares.

- ✓ Powerful and high pressure: specially indicated for restaurants, ice-cream shops, pastries and butcheries.
- ✓ Constructed from stainless steel.
- ✓ Door divided in two parts, perfectly counterbalanced, easy to handle.
- ✓ Double skinned machines: silent working and reduced thermal dispersions.
- ✓ Wash tank without corners to avoid dirt accumulation in angles.
- ✓ Stamped wash dispersers in stainless steel tubes.
- ✓ Easy to remove wash- and rinse dispersers.
- ✓ Safety micro switch at the door and electronic safety device to guarantee washing temperature and time.
- ✓ Advanced LCD control panel with humidity protection. Display of wash and rinse temperatures.
- ✓ Reduced water consumption.

INCLUDES

- | | |
|--|--------------------------------|
| ✓ 1 stainless steel basket and insert for 4 trays. | ✓ Rinse aid pump. |
| ✓ Detergent dosing equipment. | ✓ HRS system: steam condenser. |

OPTIONAL

UTENSIL WASHER UX-750

Rack size 780 mm x 700 mm and door clearance 820 mm. Constant temperature rinsing system.



Stainless steel basket: 1
Equipment: supplementary trays: 1
Useful height: 820 mm
Cycles: 5
Cycle duration: 120 / 180 / 240 / 360 / 480"
Production baskets / hour: 30 / 20 / 15 / 10 / 7
Pressure pump power: 9000 W
Electrical connection: .

Loading

- ✓ Pump: 3,2 Hp / 2400 W
- ✓ Tank: 6000 W
- ✓ Boiler: 9000 W
- ✓ Total loading: 11400 W

Feed water temperature: 10°C - 60°C
Wash temperature: 40°C - 70°C
Rinse temperature: 70°C - 87°C
Wash tank capacity: 75 l
Boiler capacity: 12 l
Water consumption/cycle: 4 l
Drainage base maximum height: 185 mm
Drain diameter: 30 mm

External dimensions (W x D x H)

- ✓ Width: 922 mm
- ✓ Depth (closed): 932 mm
- ✓ Depth (open): 1400 mm
- ✓ Height (closed): 2015 mm
- ✓ Height (open): 2300 mm

Net weight: 216 kg
Noise level (1m.): 76 dB(A)

Crated dimensions
960 x 1062 x 2000 mm
Gross weight: 228 kg

AVAILABLE MODELS

1303520 UX-750C 230-400/50/3N DD

1303525 UX-750BC 230-400/50/3N DD

1303521 UX-750C 220/60/3 DD

* Ask for special versions availability

SALES DESCRIPTION

Ideal to wash big sized pots and wares.

- ✓ Powerful and high pressure: specially indicated for restaurants, ice-cream shops, pastries and butcheries.
- ✓ Constructed from stainless steel.
- ✓ Door divided in two parts, perfectly counterbalanced, easy to handle.
- ✓ Double skinned machines: silent working and reduced thermal dispersions.
- ✓ Wash tank without corners to avoid dirt accumulation in angles.
- ✓ Stamped wash dispersers in stainless steel tubes.
- ✓ Easy to remove wash- and rinse dispersers.
- ✓ Safety micro switch at the door and electronic safety device to guarantee washing temperature and time.
- ✓ Advanced LCD control panel with humidity protection. Display of wash and rinse temperatures.
- ✓ Reduced water consumption.

INCLUDES

- ✓ 1 stainless steel basket and insert for 4 trays.
- ✓ Detergent dosing equipment.
- ✓ Rinse aid pump.

OPTIONAL

- ☐ Stainless basket.
- ☐ Stainless carrier for trays.

ACCESSORIES

- ☐ Stainless steel baskets
- ☐ Dosing equipments
- ☐ Manual water softeners
- ☐ Carrier for trays
- ☐ Automatic water softeners

SPECIFICATIONS

Basket dimensions: 780 mm x 700 mm

UTENSIL WASHER UX-750V

Rack size 780 mm x 700 mm and door clearance 820 mm. Constant temperature rinsing system. HRS system.



AVAILABLE MODELS

1303533 UX-750BCV 230-400/50/3N DD

** Ask for special versions availability*

ACCESSORIES

- | | |
|--|--|
| ☐ Stainless steel baskets | ☐ Dosing equipments |
| ☐ Manual water softeners | ☐ Carrier for trays |
| ☐ Automatic water softeners | |

SALES DESCRIPTION

Door clearance 820 mm.
Equipped with a steam condenser.

Ideal to wash big sized pots and wares.

- ✓ Powerful and high pressure: specially indicated for restaurants, ice-cream shops, pastries and butcheries.
- ✓ Constructed from stainless steel.
- ✓ Door divided in two parts, perfectly counterbalanced, easy to handle.
- ✓ Double skinned machines: silent working and reduced thermal dispersions.
- ✓ Wash tank without corners to avoid dirt accumulation in angles.
- ✓ Stamped wash dispersers in stainless steel tubes.
- ✓ Easy to remove wash- and rinse dispersers.
- ✓ Safety micro switch at the door and electronic safety device to guarantee washing temperature and time.
- ✓ Advanced LCD control panel with humidity protection. Display of wash and rinse temperatures.
- ✓ Reduced water consumption.

INCLUDES

- | | |
|--|--------------------------------|
| ✓ 1 stainless steel basket and insert for 4 trays. | ✓ Rinse aid pump. |
| ✓ Detergent dosing equipment. | ✓ HRS system: steam condenser. |

OPTIONAL

UTENSIL WASHER UX-1300

Rack size 1320 mm x 700 mm and door clearance 820 mm. Constant temperature rinsing system.



Stainless steel basket: 1
Equipment: supplementary trays: 1
Useful height: 820 mm
Cycles: 5
Cycle duration: 120 / 180 / 240 / 360 / 480"
Production baskets / hour: 30 / 20 / 15 / 10 / 7
Pressure pump power: 12000 W
Electrical connection: .

Loading

- ✓ Pump: 3 Hp / 2 x 2200 W
- ✓ Tank: 9000 W
- ✓ Boiler: 12000 W
- ✓ Total loading: 16400 W

Feed water temperature: 10°C - 60°C
Wash temperature: 10°C - 60°C
Rinse temperature: 65°C - 87°C
Wash tank capacity: 120 l
Boiler capacity: 20 l
Water consumption/cycle: 7.5 l
Drainage base maximum height: 218 mm
Drain diameter: 30 mm

External dimensions (W x D x H)

- ✓ Width: 1465 mm
- ✓ Depth (closed): 930 mm
- ✓ Depth (open): 1374 mm
- ✓ Height (closed): 2015 mm
- ✓ Height (open): 2330 mm

Net weight: 322 kg
Noise level (1m.): . dB(A)

Crated dimensions
1590 x 1020 x 2000 mm
Gross weight: 334 kg

AVAILABLE MODELS

1303540 UX-1300C 230-400/50/3N DD

1303544 UX-1300BC 230-400/50/3N DD

1303541 UX-1300C 220/60/3 DD

* Ask for special versions availability

SALES DESCRIPTION

Ideal to wash big sized pots and wares.

- ✓ Powerful and high pressure: specially indicated for restaurants, ice-cream shops, pastries and butcheries.
- ✓ Constructed from stainless steel.
- ✓ Door divided in two parts, perfectly counterbalanced, easy to handle.
- ✓ Double skinned machines: silent working and reduced thermal dispersions.
- ✓ Wash tank without corners to avoid dirt accumulation in angles.
- ✓ Stamped wash dispersers in stainless steel tubes.
- ✓ Easy to remove wash- and rinse dispersers.
- ✓ Safety micro switch at the door and electronic safety device to guarantee washing temperature and time.
- ✓ Advanced LCD control panel with humidity protection. Display of wash and rinse temperatures.
- ✓ Reduced water consumption.

INCLUDES

- ✓ 1 stainless steel basket and insert for 4 trays.
- ✓ Detergent dosing equipment.
- ✓ Rinse aid pump.

OPTIONAL

- ☐ Stainless basket.
- ☐ Stainless carrier for trays.

ACCESSORIES

- ☐ Stainless steel baskets
- ☐ Dosing equipments
- ☐ Manual water softeners
- ☐ Carrier for trays
- ☐ Automatic water softeners

SPECIFICATIONS

Basket dimensions: 1320 mm x 700 mm

UTENSIL WASHER UX-1300V

Rack size 1320 mm x 700 mm and door clearance 820 mm. Constant temperature rinsing system. HRS system.



SALES DESCRIPTION

Door clearance: 820 mm.
Constant temperature rinsing system.
Equipped with a steam condenser.

Ideal to wash big sized pots and wares.

- ✓ Powerful and high pressure: specially indicated for restaurants, ice-cream shops, pastries and butcheries.
- ✓ Constructed from stainless steel.
- ✓ Door divided in two parts, perfectly counterbalanced, easy to handle.
- ✓ Double skinned machines: silent working and reduced thermal dispersions.
- ✓ Wash tank without corners to avoid dirt accumulation in angles.
- ✓ Stamped wash dispersers in stainless steel tubes.
- ✓ Easy to remove wash- and rinse dispersers.
- ✓ Safety micro switch at the door and electronic safety device to guarantee washing temperature and time.
- ✓ Advanced LCD control panel with humidity protection. Display of wash and rinse temperatures.
- ✓ Reduced water consumption.

INCLUDES

- ✓ 1 stainless steel basket and insert for 4 trays.
- ✓ Rinse aid pump.
- ✓ Detergent dosing equipment.
- ✓ HRS system: steam condenser.

OPTIONAL

- ☐ Stainless basket.
- ☐ Stainless carrier for trays.

ACCESSORIES

- ☐ Stainless steel baskets
- ☐ Dosing equipments
- ☐ Manual water softeners
- ☐ Carrier for trays
- ☐ Automatic water softeners

SPECIFICATIONS

Basket dimensions: 1320 mm x 700 mm

Stainless steel basket: 1

Equipment: supplementary trays: 1

Useful height: 820 mm

Cycles: 5

Cycle duration: [v:ciclo1] / [v:ciclo2] / [v:ciclo3]

Production baskets / hour: [v:prod_hora_cestos] / [v:prod_hora_cestos_c2] / [v:prod_hora_cestos_c3]

Pressure pump power: [v:pot_bp]

Electrical connection: [v:cable_manguera]

Loading

Pump: 3 Hp / 2 x 2200 W

Tank: 9000 W

Boiler: 12000 W

Total loading: 16400 W

Feed water temperature: [v:temp_alim_min] - [v:temp_alim_max]

Wash temperature: [v:temp_lav_min] - [v:temp_lav_max]

Rinse temperature: 65°C - 87°C

Wash tank capacity: 120 l

Boiler capacity: 20 l

Water consumption/cycle: 7.5 l

Drainage base maximum height: [v:alt_desag]

Drain diameter: 30 mm

External dimensions (W x D x H)

Width: 1465 mm

Depth (closed): 930 mm

Depth (open): 1374 mm

Height (closed): 2015 mm

Height (open): 2330 mm

Net weight: 368 kg

Noise level (1m.): 76 dB(A)

AVAILABLE MODELS

1303548 UX-1300CV 230-400/50/3N DD

1303551 UX-1300BCV 230-400/50/3N DD

* Ask for special versions availability

UTENSIL WASHER LU-60

600 x 630 mm basket.



SPECIFICATIONS

Basket dimensions: 600 mm x 630 mm
Stainless steel basket: 1
Equipment: supplementary trays: 1
Useful height: 650 mm
Cycles: 3
Cycle duration: 120" / 240" / 360"
Production baskets / hour: 30 / 15 / 10
Pressure pump power: 470 W

Loading

- ✓ Pump: 3 Hp / 2200 W
- ✓ Tank: 6000 W
- ✓ Boiler: 9000 W
- ✓ Total loading: 11200 W

Feed water temperature: 10°C - 60°C
Wash temperature: 40°C - 70°C
Rinse temperature: 70°C - 95°C
Wash tank capacity: 60 l
Boiler capacity: 12 l
Water consumption / cycle: 5 l
Drainage base maximum height: 185 mm
Drain diameter: 30 mm

External dimensions (W x D x H)

- ✓ Width: 742 mm
- ✓ Depth (closed): 852 mm
- ✓ Depth (open): 1232 mm
- ✓ Height (closed): 1840 mm
- ✓ Height (open): 2035 mm

Net weight: 168 kg
Noise level (1m.): 76 dB(A)

Crated dimensions

790 x 980 x 1950 mm

AVAILABLE MODELS

1300570	Utensil washer LU-60 230-400/50/3N
1300574	Utensil washer LU-60B 230-400/50/3N (with drain pump)
1300579	Utensil washer LU-60 230-400/50/3N DD
1300571	Utensil washer LU-60 400/50/3 without N
1300572	Utensil washer LU-60 220/60/3
1300573	Utensil washer LU-60 440/60/3 SIN N
1300575	Utensil washer LU-60B 400/50/3 without N
1300576	Utensil washer LU-60B 220/60/3
1300569	Utensil washer LU-60B 440/60/3N
1300577	Utensil washer LU-60B 440/60/3 without N
1300568	Utensil washer LU-60 400/60/3N
1300567	Utensil washer LU-60B 230-400/50/3N DD (with drain pump)

* Ask for special versions availability

SALES DESCRIPTION

Max. loading height: 650 mm.

Ideal to wash big sized pots and wares.

- ✓ Powerful and high pressure: specially indicated for restaurants, ice-cream shops, pastries and butcheries.
- ✓ Constructed from stainless steel.
- ✓ Door divided in two parts, perfectly counterbalanced, easy to handle.
- ✓ Double skinned machines: silent working and reduced thermal dispersions.
- ✓ Wash tank without corners to avoid dirt accumulation in angles.
- ✓ Stamped wash dispersers in stainless steel tubes.
- ✓ Easy to remove wash- and rinse dispersers.
- ✓ Safety micro switch at the door and electronic safety device to guarantee washing temperature and time.
- ✓ Electronic control panel with LED showing wash and rinse temperature.

INCLUDES


- ✓ 1 stainless steel basket and insert for 4 trays.

OPTIONAL


- ☐ Kit Adjustable detergent dosing equipment.
- ☐ Kit Rinse aid dosing equipment.
- ☐ Stainless basket.
- ☐ Stainless carrier for trays.

ACCESSORIES

- ☐ Stainless steel baskets
- ☐ Manual water softeners
- ☐ Automatic water softeners
- ☐ Dosing equipments
- ☐ Carrier for trays

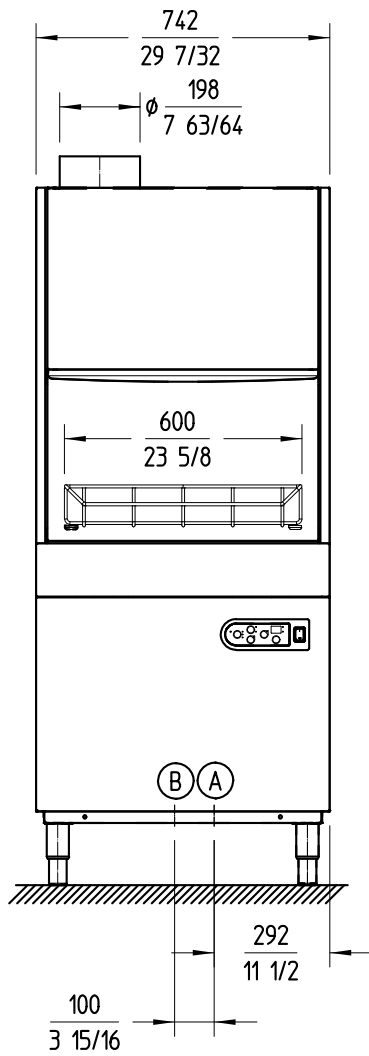

A- Entrada de agua 3/4" GAS
 B- Tubo de desagüe Ø30 mm

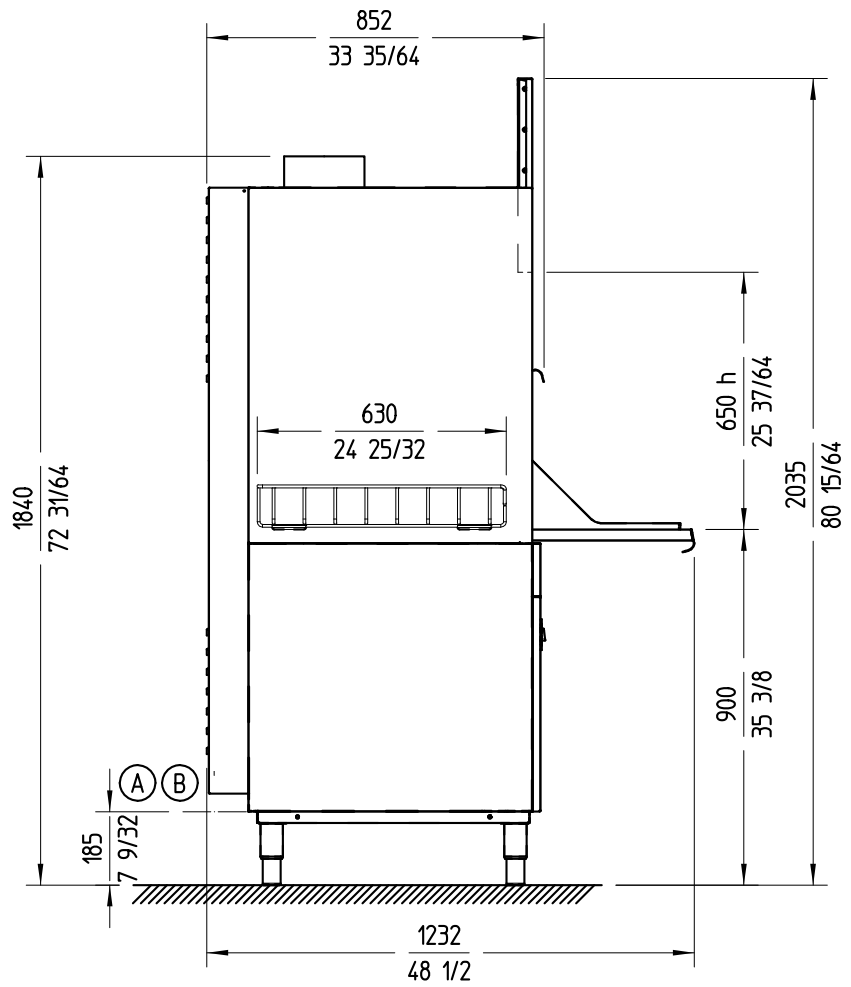

UTENSIL WASHER LU-75

780 x 700 mm basket.



SPECIFICATIONS

Basket dimensions: 780 mm x 700 mm
Stainless steel basket: 1
Equipment: supplementary trays: 1
Useful height: 650 mm
Cycles: 3
Cycle duration: 120" / 240" / 360"
Production baskets / hour: 30 / 15 / 10
Pressure pump power: 470 W

Loading

- ✓ Pump: 3,2 Hp / 2400 W
- ✓ Tank: 6000 W
- ✓ Boiler: 10500 W
- ✓ Total loading: 12900 W

Temperature: 10°C - 60°C
Wash temperature: 40°C - 70°C
Rinse temperature: 70°C - 95°C
Wash tank capacity: 80 l
Boiler capacity: 12 l
Water consumption / cycle: 6 l
Drainage base maximum height: 185 mm
Drain diameter: 30 mm

External dimensions (W x D x H)

- ✓ Width: 922 mm
- ✓ Depth (closed): 932 mm
- ✓ Depth (open): 1312 mm
- ✓ Height (closed): 1840 mm
- ✓ Height (open): 2035 mm

Net weight: 196 kg
Noise level (1m.): 76 dB(A)

Crated dimensions

960 x 1060 x 1950 mm

AVAILABLE MODELS

1300580	Utensil washer LU-75 230-400/50/3N
1300584	Utensil washer LU-75B 230-400/50/3N (with drain pump)
1300589	Utensil washer LU-75 230-400/50/3N DD
1300587	Utensil washer LU-75B 440/60/3 without N
1300586	Utensil washer LU-75B 220/60/3
1300585	Utensil washer LU-75B 400/50/3 without N
1300583	Utensil washer LU-75 440/60/3 without N
1300582	Utensil washer LU-75 220/60/3
1300581	Utensil washer LU-75 400/50/3 without N
1300590	Utensil washer LU-75B 230-400/50/3N DD(with drain pump)

* Ask for special versions availability

SALES DESCRIPTION

Max. loading height: 650 mm.

Ideal to wash big sized pots and wares.

- ✓ Powerful and high pressure: specially indicated for restaurants, ice-cream shops, pastries and butcheries.
- ✓ Constructed from stainless steel.
- ✓ Door divided in two parts, perfectly counterbalanced, easy to handle.
- ✓ Double skinned machines: silent working and reduced thermal dispersions.
- ✓ Wash tank without corners to avoid dirt accumulation in angles.
- ✓ Stamped wash dispersers in stainless steel tubes.
- ✓ Easy to remove wash- and rinse dispersers.
- ✓ Safety micro switch at the door and electronic safety device to guarantee washing temperature and time.
- ✓ Electronic control panel with LED showing wash and rinse temperature.

INCLUDES


- ✓ 1 stainless steel basket and insert for 4 trays.

OPTIONAL

- ☐ Kit Adjustable detergent dosing equipment.
- ☐ Kit Rinse aid dosing equipment.
- ☐ Stainless basket.
- ☐ Stainless carrier for trays.

ACCESSORIES

- ☐ Stainless steel baskets
- ☐ Manual water softeners
- ☐ Automatic water softeners
- ☐ Dosing equipments
- ☐ Carrier for trays

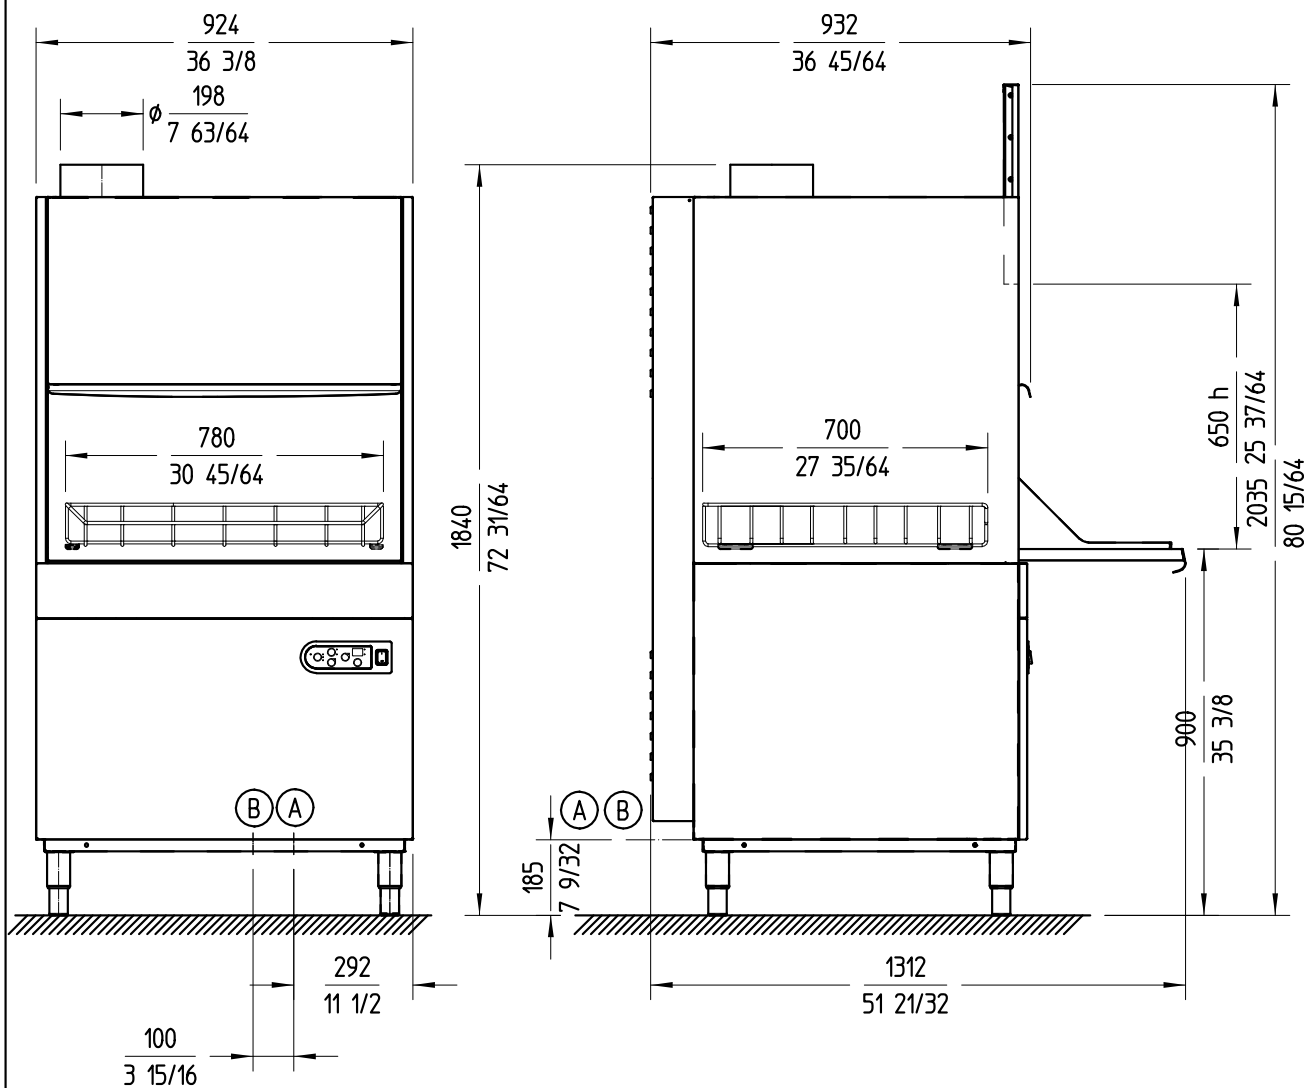

A- Entrada de agua 3/4" GAS
 B- Tubo de desagüe Ø30 mm

UTENSIL WASHER LU-61H

630 x 550 mm basket. Maximum loading height: 820 mm.



SALES DESCRIPTION

Ideal for washing large utensils.

Ideal to wash big sized pots and wares, with a special height of 820mm.

- ✓ Powerful and high pressure: specially indicated for restaurants, ice-cream shops, pastries and butcheries.
- ✓ Constructed from stainless steel.
- ✓ Door divided in two parts, perfectly counterbalanced, easy to handle.
- ✓ Double skinned machines: silent working and reduced thermal dispersions.
- ✓ Wash tank without corners to avoid dirt accumulation in angles.
- ✓ Stamped wash dispersers in stainless steel tubes.
- ✓ Easy to remove wash- and rinse dispersers.
- ✓ Safety micro switch at the door and electronic safety device to guarantee washing temperature and time.
- ✓ Electronic control panel with LED showing wash and rinse temperature.

INCLUDES

- ✓ 1 stainless steel basket and insert for 4 trays.
- ✓ Peristaltic detergent dosing equipment.
- ✓ Hydraulic rinse-aid dosing equipment.

OPTIONAL

SPECIFICATIONS

Basket dimensions: 630 mm x 550 mm
Stainless steel basket: 1
Equipment: supplementary trays: 1
Useful height: 820 mm
Cycles: 3
Cycle duration: 120" / 240" / 360"
Production baskets / hour: 30 / 15 / 10
Pressure pump power: 370 W

Loading

- ✓ Pump: 4 Hp / 3000 W
- ✓ Tank: 5300 W
- ✓ Boiler: 8300 W
- ✓ Total loading: 11200 W

Feed water temperature: 10°C - 60°C
Wash temperature: 10°C - 60°C
Rinse temperature: 10°C - 90°C
Wash tank capacity: 60 l
Boiler capacity: 8 l
Water consumption / cycle: 7 l

External dimensions (W x D x H)

- ✓ Width: 675 mm
- ✓ Depth (closed): 803 mm
- ✓ Depth (open): 1150 mm
- ✓ Height (closed): 2015 mm
- ✓ Height (open): 2200 mm

Net weight: 150 kg

Crated dimensions

900 x 910 x 1950 mm
Gross weight: 195 kg

AVAILABLE MODELS

5700485 Utensil washer LU-61H 400/50/3N

5700486 Utensil washer LU-61H 440/60/3

5700487 Utensil washer LU-61H 230/60/3

* Ask for special versions availability

ACCESSORIES

- ☐ Stainless steel baskets
- ☐ Automatic water softeners
- ☐ Manual water softeners
- ☐ Carrier for trays

UTENSIL WASHER LU-130

1350 x 700 mm basket.



SPECIFICATIONS

Basket dimensions: 1350 mm x 700 mm
Stainless steel basket: 1
Equipment: supplementary trays: 1
Useful height: 680 mm
Cycles: 3
Cycle duration: 120" / 240" / 360"
Production baskets / hour: 20 / 10 / 6
Pressure pump power: 370 W

Loading

- ✓ Pump: 6 Hp / 4400 W
- ✓ Tank: 9800 W
- ✓ Boiler: 19600 W
- ✓ Total loading: 24000 W

Feed water temperature: 10°C - 60°C
Wash temperature: 10°C - 60°C
Rinse temperature: 10°C - 90°C
Wash tank capacity: 150 l
Boiler capacity: 14 l
Water consumption / cycle: 8 l

External dimensions (W x D x H)

- ✓ Width: 1520 mm
- ✓ Depth (closed): 890 mm
- ✓ Depth (open): 1235 mm
- ✓ Height (closed): 1760 mm
- ✓ Height (open): 2080 mm

Net weight: 220 kg

AVAILABLE MODELS

5700510 Utensil washer LU-130 400/50/3N

5700511 Utensil washer LU-130 230/50/3

5700515 Utensil washer LU-130 380/60/3

5700520 Utensil washer LU-130 220/60/3

* Ask for special versions availability

SALES DESCRIPTION

Max. loading height: 680 mm.

Ideal to wash big sized pots and wares.

- ✓ Powerful and high pressure: specially indicated for restaurants, ice-cream shops, pastries and butcheries.
- ✓ Constructed from stainless steel.
- ✓ Door divided in two parts, perfectly counterbalanced, easy to handle.
- ✓ Double skinned machines: silent working and reduced thermal dispersions.
- ✓ Wash tank without corners to avoid dirt accumulation in angles.
- ✓ Stamped wash dispersers in stainless steel tubes.
- ✓ Easy to remove wash- and rinse dispersers.
- ✓ Safety micro switch at the door and electronic safety device to guarantee washing temperature and time.
- ✓ Electronic control panel with LED showing wash and rinse temperature.

INCLUDES

- ✓ 1 stainless steel basket and insert for 4 trays.
- ✓ Peristaltic detergent dosing equipment.

OPTIONAL

ACCESSORIES

- ☐ Stainless steel baskets
- ☐ Automatic water softeners
- ☐ Manual water softeners
- ☐ Carrier for trays



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04	Иваново (4932)77-34-06	Магнитогорск (3519)55-03-13	Ростов-на-Дону (863)308-18-15	Тольятти (8482)63-91-07
Ангарск (3955)60-70-56	Ижевск (3412)26-03-58	Москва (495)268-04-70	Рязань (4912)46-61-64	Томск (3822)98-41-53
Архангельск (8182)63-90-72	Иркутск (395)279-98-46	Мурманск (8152)59-64-93	Самара (846)206-03-16	Тула (4872)33-79-87
Астрахань (8512)99-46-04	Казань (843)206-01-48	Набережные Челны (8552)20-53-41	Санкт-Петербург (812)309-46-40	Тюмень (3452)66-21-18
Барнаул (3852)73-04-60	Калининград (4012)72-03-81	Нижний Новгород (831)429-08-12	Саратов (845)249-38-78	Ульяновск (8422)24-23-59
Белгород (4722)40-23-64	Калуга (4842)92-23-67	Новокузнецк (3843)20-46-81	Севастополь (8692)22-31-93	Улан-Удэ (3012)59-97-51
Благовещенск (4162)22-76-07	Кемерово (3842)65-04-62	Ноябрьск (3496)41-32-12	Саранск (8342)22-96-24	Уфа (347)229-48-12
Брянск (4832)59-03-52	Киров (8332)68-02-04	Новосибирск (383)227-86-73	Симферополь (3652)67-13-56	Хабаровск (4212)92-98-04
Владивосток (423)249-28-31	Коломна (4966)23-41-49	Омск (3812)21-46-40	Смоленск (4812)29-41-54	Чебоксары (8352)28-53-07
Владикавказ (8672)28-90-48	Кострома (4942)77-07-48	Орел (4862)44-53-42	Сочи (862)225-72-31	Челябинск (351)202-03-61
Владимир (4922)49-43-18	Краснодар (861)203-40-90	Оренбург (3532)37-68-04	Ставрополь (8652)20-65-13	Череповец (8202)49-02-64
Волгоград (844)278-03-48	Красноярск (391)204-63-61	Пенза (8412)22-31-16	Сургут (3462)77-98-35	Чита (3022)38-34-83
Вологда (8172)26-41-59	Курск (4712)77-13-04	Петрозаводск (8142)55-98-37	Сыктывкар (8212)25-95-17	Якутск (4112)23-90-97
Воронеж (473)204-51-73	Курган (3522)50-90-47	Псков (8112)59-10-37	Тамбов (4752)50-40-97	Ярославль (4852)69-52-93
Екатеринбург (343)384-55-89	Липецк (4742)52-20-81	Пермь (342)205-81-47	Тверь (4822)63-31-35	

Россия +7(495)268-04-70	Казахстан +(727)345-47-04	Беларусь +(375)257-127-884	Узбекистан +998(71)205-18-59	Киргизия +996(312)96-26-47
-------------------------	---------------------------	----------------------------	------------------------------	----------------------------