

Коммерческие вакуумные упаковочные машины SU-310/316/416/420/604/606

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: sir@nt-rt.ru || сайт: <https://sammic.nt-rt.ru/>

VACUUM SEALER SU-310

Tabletop model. 10 m³/h. 320 mm.



SALES DESCRIPTION

320 mm sealing bar.
10 m³/h Busch vacuum pump.
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 99-programme memory. Blocking option.
- ✓ "Pause" button to marinate food.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Bag sealing program.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with automatic decompression.
- ✓ Stainless steel body and chamber. Deep-drawn chamber.
- ✓ Damped transparent lid.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed model.

INCLUDES

- ✓ Busch pump.
- ✓ Sensor controls.
- ✓ Programmable.
- ✓ Bluetooth connectivity.
- ✓ Vacuum plus: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ Pause function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF approved.
- ✓ Filling plate.

OPTIONAL

- ☐ Inert gas.
- ☐ Printer.
- ☐ Vacuum packing bags.
- ☐ External vacuum kit for
- Vac-Norm, containers and accessories.
- ☐ Support for liquid packaging.
- ☐ Additional filling plates.

ACCESSORIES

- ☐ Filling plates
- ☐ Liquid insert plates
- ☐ Vac-norm external vacuum kit
- ☐ Vac-norm containers
- ☐ Smooth bags for vacuum packing
- ☐ Trolley for vacuum packing
- machines
- ☐ Thermal labels for CG2 / RB printer
- ☐ RB desktop printer for SU vacuum packing machines
- ☐ Thermal transfer labels for RB printer

SPECIFICATIONS

Pump capacity: 10 m³/h
Pump capacity (60 Hz): 12 m³/h
Bar length: 320 mm
Total loading: 370 W
Vacuum pressure (maximum): 2 mbar

Internal dimensions

- ✓ Width: 330 mm
- ✓ Depth: 360 mm
- ✓ Height: 155 mm

External dimensions (W x D x H)

- ✓ Width: 384 mm
- ✓ Depth: 465 mm
- ✓ Height: 403 mm

Noise level (1m.): 75 dB(A)
Background noise: 32 dB(A)

AVAILABLE MODELS

1140732	SU-310P 230/50-60/1
1140733	SU-310GP 230/50-60/1
1140737	SU-310P 120/50-60/1
1140738	SU-310GP 120/50-60/1
1140740	SU-310GP+ 120/60/1
1140727	SU-310GP 230/50-60/1 AUS
1141093	SU-310P 100/50-60/1

* Ask for special versions availability

VACUUM SEALER SU-316

Tabletop model. 16 m³/h. 320 mm.



SALES DESCRIPTION

320 mm sealing bar.
16 m³/h Busch vacuum pump.
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 99-programme memory. Blocking option.
- ✓ "Pause" button to marinate food.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Bag sealing program.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with automatic decompression.
- ✓ Stainless steel body and chamber. Deep-drawn chamber.
- ✓ Damped transparent lid.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed model.

INCLUDES

- ✓ BUSCH pump.
- ✓ Sensor controls.
- ✓ Programmable.
- ✓ Bluetooth connectivity.
- ✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ "PAUSE" function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF approved.
- ✓ Filling plate.

OPTIONAL

- ☐ Inert gas.
- ☐ Sealing plus.
- ☐ Printer.
- ☐ Vacuum packing bags.
- ☐ External vacuum kit for Vac-Norm, containers and accessories.
- ☐ Support for liquid packaging.
- ☐ Additional filling plates.

ACCESSORIES

- ☐ Filling plates
- ☐ Liquid insert plates
- ☐ Vac-norm external vacuum kit
- ☐ Vac-norm containers
- ☐ Smooth bags for vacuum packing
- ☐ Trolley for vacuum packing
- machines
- ☐ Thermal labels for CG2 / RB printer
- ☐ RB desktop printer for SU vacuum packing machines
- ☐ Thermal transfer labels for RB printer

SPECIFICATIONS

Pump capacity: 16 m³/h

Pump capacity (60 Hz): 19 m³/h

Bar length: 320 mm

Vacuum pressure (maximum): 2 mbar

Internal dimensions

- ✓ Width: 330 mm
- ✓ Depth: 360 mm
- ✓ Height: 155 mm

External dimensions (W x D x H)

- ✓ Width: 384 mm
- ✓ Depth: 465 mm
- ✓ Height: 403 mm

Noise level (1m.): 75 dB(A)

Background noise: 32 dB(A)

AVAILABLE MODELS

1140744 SU-316P 230/50-60/1

1140746 SU-316P+ 230/50-60/1



1140747 SU-316GP 230/50-60/1

1140749 SU-316GP+ 230/50-60/1

1140755 SU-316P+ 120/50-60/1

1140758 SU-316GP+ 120/50-60/1

* Ask for special versions availability

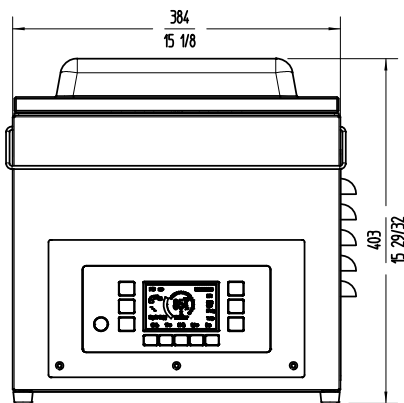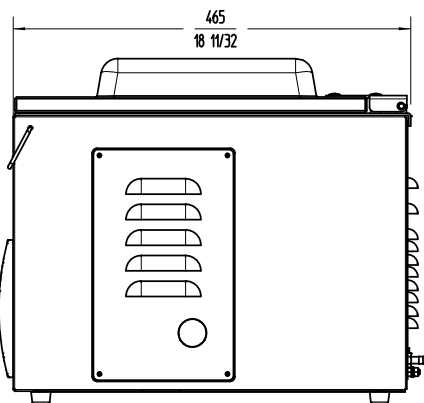

VACUUM SEALER SU-416

Tabletop model. 16 m³/h. 420 mm.



SALES DESCRIPTION

420 mm sealing bar.
16 m³/h Busch vacuum pump.
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 99-programme memory. Blocking option.
- ✓ "Pause" button to marinate food.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Bag sealing program.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with automatic decompression.
- ✓ Stainless steel body and chamber. Deep-drawn chamber.
- ✓ Damped transparent lid.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.

INCLUDES

- ✓ Busch pump.
- ✓ Sensor controls.
- ✓ Programmable.
- ✓ Bluetooth connectivity.
- ✓ Vacuum plus: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ Pause function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF approved.
- ✓ Filling plate.

OPTIONAL

- ☐ Inert gas.
- ☐ Printer.
- ☐ Vacuum packing bags.
- ☐ External vacuum kit for Vac-Norm, containers and accessories.
- ☐ Bag cutting kit.
- ☐ Support for liquid packaging.
- ☐ Additional filling plates.

ACCESSORIES

- ☐ Bag cutting kits
- ☐ Filling plates
- ☐ Liquid insert plates
- ☐ Vac-norm external vacuum kit
- ☐ Vac-norm containers
- ☐ Smooth bags for vacuum packing
- ☐ Trolley for vacuum packing machines
- ☐ Thermal labels for CG2 / RB printer
- ☐ RB desktop printer for SU vacuum packing machines
- ☐ Thermal transfer labels for RB printer

SPECIFICATIONS

Pump capacity: 16 m³/h
Pump capacity (60 Hz): 19 m³/h
Bar length: 420 mm
Total loading: 550 W
Vacuum pressure (maximum): 2 mbar

Internal dimensions

- ✓ Width: 430 mm
- ✓ Depth: 415 mm
- ✓ Height: 180 mm

External dimensions (W x D x H)

- ✓ Width: 484 mm
- ✓ Depth: 529 mm
- ✓ Height: 448 mm (230V) / 529 mm (120V)

Noise level (1m.): 75 dB(A)
Background noise: 32 dB(A)

Crated dimensions
600 x 600 x 610 mm

AVAILABLE MODELS

1140762 SU-416P 230/50-60/1

1140763 SU-416GP 230/50-60/1

1140767 SU-416P 120/50-60/1

1140768 SU-416GP 120/50-60/1

1140770 SU-416GP+ 120/50-60/1

1140728 SU-416GP 230/50-60/1 AUS

1141092 SU-416GP+ 100/50-60/1

1141094 SU-416P+ 100/50-60/1

* Ask for special versions availability

VACUUM SEALER SU-420

Tabletop model. 20 m³/h. 420 mm.



SALES DESCRIPTION

420 mm sealing bar.
20 m³/h Busch vacuum pump.
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 99-programme memory. Blocking option.
- ✓ "Pause" button to marinate food.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Bag sealing program.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with automatic decompression.
- ✓ Stainless steel body and chamber. Deep-drawn chamber.
- ✓ Damped transparent lid.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.

INCLUDES

- ✓ BUSCH pump.
- ✓ Sensor controls.
- ✓ Programmable.
- ✓ Bluetooth connectivity.
- ✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ "PAUSE" function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF approved.
- ✓ Filling plate.

OPTIONAL

- ☐ Inert gas.
- ☐ Sealing plus.
- ☐ Printer.
- ☐ Vacuum packing bags.
- ☐ External vacuum kit for Vac-Norm, containers and accessories.
- ☐ Support for liquid packaging.
- ☐ Additional filling plates.

ACCESSORIES

- ☐ Bag cutting kits
- ☐ Filling plates
- ☐ Liquid insert plates
- ☐ Vac-norm external vacuum kit
- ☐ Vac-norm containers
- ☐ Smooth bags for vacuum packing
- ☐ Trolley for vacuum packing machines
- ☐ Thermal labels for CG2 / RB printer
- ☐ RB desktop printer for SU vacuum packing machines
- ☐ Thermal transfer labels for RB printer

SPECIFICATIONS

Pump capacity: 20 m³/h
Pump capacity (60 Hz): 24 m³/h
Bar length: 420 mm
Total loading: 750 W
Vacuum pressure (maximum): 2 mbar

Internal dimensions

- ✓ Width: 430 mm
- ✓ Depth: 415 mm
- ✓ Height: 180 mm

External dimensions (W x D x H)

- ✓ Width: 484 mm
- ✓ Depth: 529 mm
- ✓ Height: 448 mm (230V) / 529 mm (120V)

Net weight: 56.7 kg

Noise level (1m.): 75 dB(A)
Background noise: 32 dB(A)

Crated dimensions
600 x 600 x 610 mm
Gross weight: 62.7 kg

AVAILABLE MODELS

1140774	SU-420P 230/50-60/1
1140776	SU-420P+ 230/50-60/1
1140777	SU-420GP 230/50-60/1
1140779	SU-420GP+ 230/50-60/1
1140781	SU-420 120/50-60/1
1140783	SU-420P 120/50-60/1
1140784	SU-420+ 120/50-60/1
1140785	SU-420P+ 120/50-60/1
1140786	SU-420GP 120/50-60/1
1140788	SU-420GP+ 120/50-60/1
1140729	SU-420GP 230/50-60/1 AUS

* Ask for special versions availability

VACUUM SEALER SU-606

Floorstanding unit. 63 m³/h. 413 + 656 mm.



SALES DESCRIPTION

Two sealing bars 413 + 656 mm.
63 m³/h Busch vacuum pump.
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 99-programme memory. Blocking option.
- ✓ "Pause" button to marinate food.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Bag sealing program.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with automatic decompression.
- ✓ Stainless steel body and chamber.
- ✓ Damped transparent lid.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed model.

INCLUDES

- ✓ BUSCH pump.
- ✓ Sensor controls.
- ✓ Programmable.
- ✓ Bluetooth connectivity.
- ✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ "PAUSE" function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF approved.
- ✓ Filling plate.

OPTIONAL

- ☐ Inert gas.
- ☐ Sealing plus.
- ☐ Printer.
- ☐ Vacuum packing bags.
- ☐ External vacuum kit for
- Vac-Norm, containers and accessories.
- ☐ Bag cutting kit.
- ☐ Support for liquid packaging.
- ☐ Additional filling plates.

ACCESSORIES

- ☐ Bag cutting kits
- ☐ Filling plates
- ☐ Liquid insert plates
- ☐ Vac-norm external vacuum kit
- ☐ Vac-norm containers
- ☐ Smooth bags for vacuum
- packing
- ☐ Thermal labels for CG2 / RB printer
- ☐ RB desktop printer for SU vacuum packing machines
- ☐ Thermal transfer labels for RB printer

SPECIFICATIONS

Pump capacity: 63 m³/h
Pump capacity (60 Hz): 75 m³/h
Bar length: 413 mm
Total loading: 1500 W
Vacuum pressure (maximum): 0.5 mbar

Internal dimensions

- ✓ Width: 672 mm
- ✓ Depth: 481 mm
- ✓ Height: 200 mm

External dimensions (W x D x H)

- ✓ Width: 740 mm
- ✓ Depth: 566 mm
- ✓ Height: 997 mm (230V) / (120V)


Noise level (1m.): 75 dB(A)
Background noise: 32 dB(A)

Crated dimensions
670 x 830 x 1200 mm

AVAILABLE MODELS

1140838	SU-606P 230-400/50/3N
1140840	SU-606P+ 230-400/50/3N
1140841	SU-606GP 230-400/50/3N
1140843	SU-606GP+ 230-400/50/3N
1140858	SU-606P 208-240/60/3
1140860	SU-606P+ 208-240/60/3
1140861	SU-606GP 208-240/60/3
1140863	SU-606GP+ 208-240/60/3
1140877	SU-606GP+ 230/50/1

* Ask for special versions availability

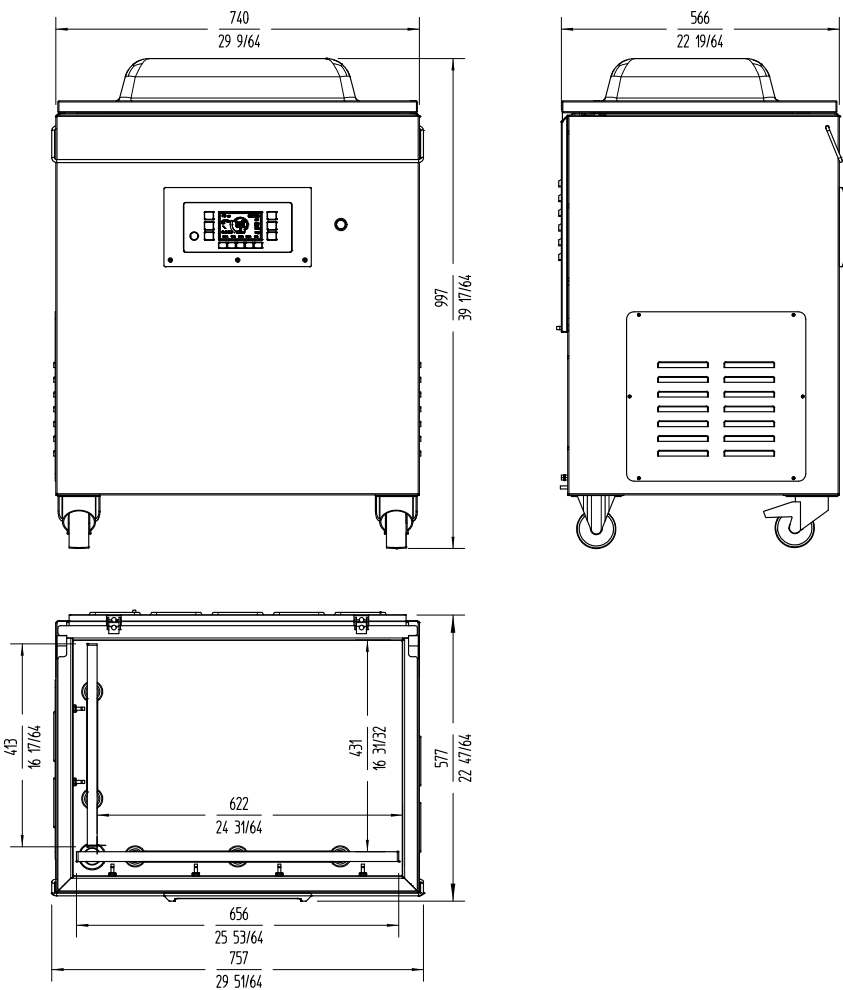

VACUUM SEALER SU-604

Floorstanding unit. 40 m³/h. 413 + 656 mm.



SALES DESCRIPTION

Two sealing bars 413 + 656 mm.
40 m³/h Busch vacuum pump.
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 99-programme memory. Blocking option.
- ✓ "Pause" button to marinate food.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Bag sealing program.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with automatic decompression.
- ✓ Stainless steel body and chamber.
- ✓ Damped transparent lid.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed model.

INCLUDES

- ✓ Busch pump.
- ✓ Sensor controls.
- ✓ Programmable.
- ✓ Bluetooth connectivity.
- ✓ Vacuum plus: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ Pause function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF approved.
- ✓ Filling plate.

OPTIONAL

- ☐ Inert gas.
- ☐ Printer.
- ☐ Vacuum packing bags.
- ☐ External vacuum kit for Vac-Norm, containers and accessories.
- ☐ Bag cutting kit.
- ☐ Support for liquid packaging.
- ☐ Additional filling plates.

ACCESSORIES

- ☐ Bag cutting kits
- ☐ Filling plates
- ☐ Liquid insert plates
- ☐ Vac-norm external vacuum kit
- ☐ Vac-norm containers
- ☐ Smooth bags for vacuum packing
- ☐ Thermal labels for CG2 / RB printer
- ☐ RB desktop printer for SU vacuum packing machines
- ☐ Thermal transfer labels for RB printer

SPECIFICATIONS

Pump capacity: 40 m³/h
Pump capacity (60 Hz): 48 m³/h
Bar length: 413 mm
Total loading: 1100 W
Vacuum pressure (maximum): 0.5 mbar

Internal dimensions

- ✓ Width: 672 mm
- ✓ Depth: 481 mm
- ✓ Height: 200 mm

External dimensions (W x D x H)

- ✓ Width: 740 mm
- ✓ Depth: 566 mm
- ✓ Height: 997 mm (230V) / (120V)

Noise level (1m.): 75 dB(A)
Background noise: 32 dB(A)

Crated dimensions
670 x 830 x 1200 mm

AVAILABLE MODELS

1140814 SU-604P 230-400/50/3N

1140815 SU-604GP 230-400/50/3N

1140826 SU-604P 208-240/60/3

1140828 SU-604P 380/60/3N

1140827 SU-604GP 208-240/60/3

* Ask for special versions availability

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: sir@nt-rt.ru || сайт: <https://sammic.nt-rt.ru/>